



Multichannel headend Multiband system amplifier

- FM, Bill & DAB and UHF inputs
- high output level
- built-in gain controls
- DC feeding for preamplifiers through RF inputs
- DIN rail or wall mounting
- robust die-cast housing
- connectors:
4xRF - type F
screw terminal block for DC entry
power distribution bus



Technical specifications		ma400
TYPE		
Ordering number		10503
Gain	FM (88-108 MHz)	30 dB
	VHFIII (174-260 MHz)	30 dB
	UHF (470-862 MHz)	30 dB
Number of inputs		3
Noise figure		VHF < 7 dB; UHF < 5 dB
Maximal output level IMD3=60 dB (DIN45004B)		VHF 116 dBμV; UHF 118 dBμV
Gain control	attenuator	0 ÷ -15 dB
	switch	0/-10 dB
Return loss		> 10 dB
DC feeding for external (total)		12 V 0.1 A max.
Current consumption*		12 V 0.48 A
Operating temperature range		0° ÷ +50° C
Dimensions/Weight (packed)		36x198x107.5 mm/ 0.9 kg


* without external DC loading

Power supply

- modular power supply with integrated RF combiner
- switch-mode technology
- short circuit and overload protected
- DIN rail or wall mounting
- robust die-cast housing
- connectors:
3xRF - type F
screw terminal block for DC output
power distribution bus



Technical specifications		UP410S
TYPE		
Ordering number		02874S
Power supply	input voltage	187-250 V~ 50/60 Hz
	output voltage, current	12 V 4.5 A max.
	power consumption	65 W max.
RF combiner	frequency range	47-2400 MHz
	insertion loss	4 dB at 862 MHz 6 dB at 2400 MHz
	isolation	≥ 20 dB
	return loss	≥ 20 dB at 862 MHz ≥ 12 dB at 2400 MHz
Operating temperature range		0° ÷ +50° C
Dimensions/Weight (packed)		48x198x107.5 mm/0.97 kg

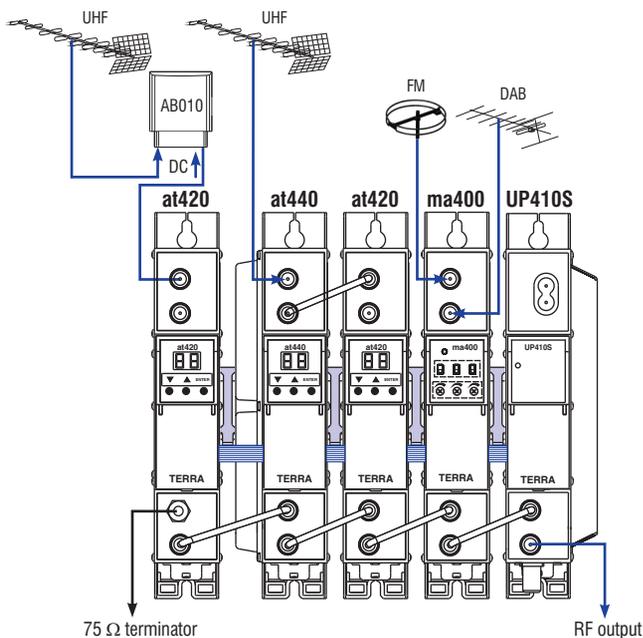

Application diagram of filtering 8 TV channels from 2 directions & combining with FM and DAB signals.
DC power is distributed from single power supply by power distribution bus.

AB010 - fixed gain UHF masthead amplifier
at420 - two sections TV channel amplifier
at440 - four sections TV channel amplifier