

HWN-4104MH-4P(E)
4-ch 1U POE NVR




- Up to 4-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video formats
- Up to 2-ch@8 MP/4-ch@4 MP/8-ch@1080p decoding capacity
- Up to 40 Mbps incoming bandwidth

▪ Specification

| Motion Detection 2.0 | |
|-----------------------------|--|
| Human/Vehicle Analysis | 1-ch |
| Video and Audio | |
| IP Video Input | 4-ch |
| Incoming Bandwidth | 40 Mbps |
| Outgoing Bandwidth | 80 Mbps |
| HDMI Output | 1-ch, 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz; HDMI/VGA simultaneous output, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz; |
| VGA Output | 1-ch, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1280 × 720 /60Hz |
| Video Output Mode | HDMI/VGA simultaneous output |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) |
| Two-Way Audio | 1-ch, RCA (2.0 Vp-p, 1 KΩ) |
| Decoding | |
| Decoding Format | H.265+, H.265, H.264+, H.264 |
| Recording Resolution | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF |
| Synchronous playback | 4-ch |
| Decoding Capability | AI&4K Off: 8-ch@1080p(30fps) AI/4K On: 6-ch@1080p(30fps) *: The length or width of camera resolution (each track) cannot exceed 4096 pixels. |
| Network | |
| Remote Connection | 32 |
| Network Protocol | TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS |
| Network Interface | 1, RJ-45 10/100 Mbps self-adaptive Ethernet interface |
| PoE | |
| Interface | 4, RJ-45 10/100 Mbps self-adaptive Ethernet interface |
| Power | ≤ 50 W |
| Standard | IEEE 802.3 af/at |
| Auxiliary Interface | |
| SATA | 1 SATA interface |
| Capacity | Up to 8TB capacity for each disk |
| USB Interface | 2 × USB 2.0 |
| General | |
| Power Supply | 48 VDC or ≤ 65 W |
| Consumption | ≤ 10 W |
| Working Temperature | -10 to +55° C (+14 to +131° F) |
| Working Humidity | 10 to 90 % |
| Chassis | 1U |
| Dimension (W × D × H) | 263 × 223 × 48 mm (10.34" × 8.76" × 1.87") |
| Weight | ≤ 1.5 kg (3.3 lb) |
| Certification | |
| CE | 55032/55035/61000-3-2/61000-3-3/50130-4 |

▪ Physical Interface

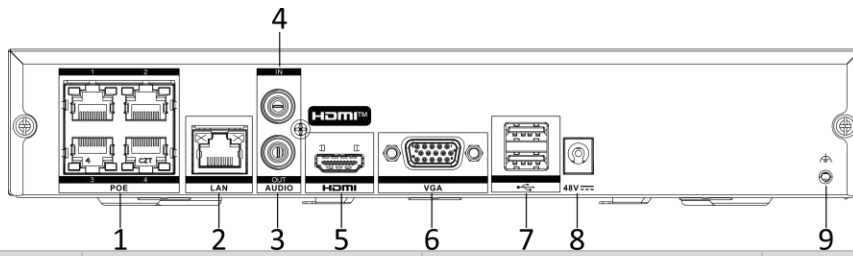


| Number | Description | Number | Description |
|--------|-----------------------|--------|--------------------|
| 1 | PoE interfaces | 6 | VGA interface |
| 2 | LAN network interface | 7 | USB interfaces |
| 3 | Audio out | 8 | 48 VDC power input |
| 4 | Audio in | 9 | GND |
| 5 | HDMI interface | | |

▪ Available Model

HWN-4104MH-4P(E)(STD)

▪ Dimension

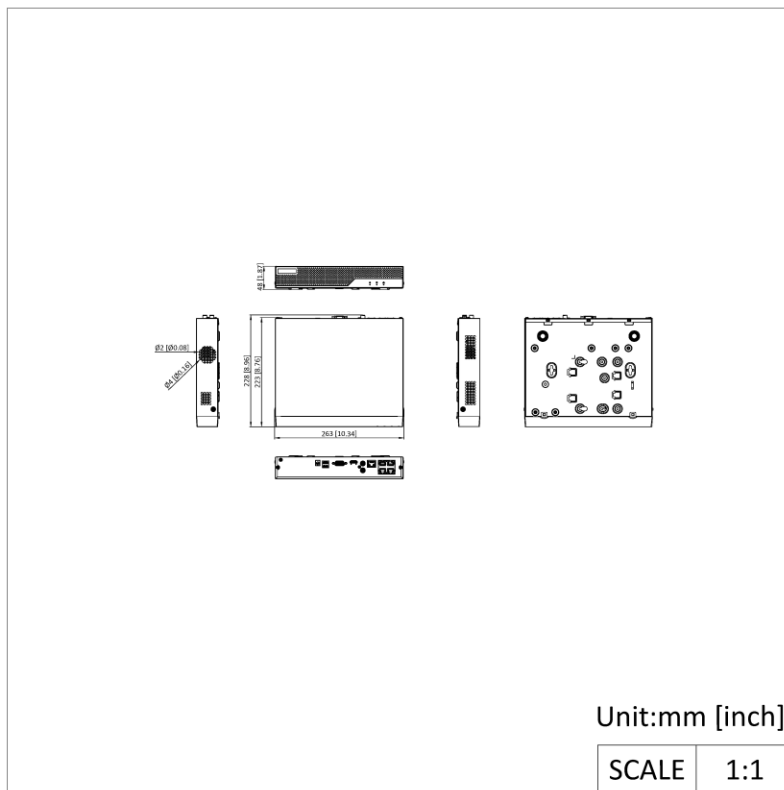

See Far, Go Further



www.hikvision.com
support@hikvision.com

