



## Wi-Fi 6 Cloud-Managed Wall-Plate Access Point

Provides exceptional in-room wired and wireless connectivity

### Product Highlights

EnGenius Cloud Managed ECW215 Wi-Fi 6 dual-band 2x2:2 wall-plate access point with built-in 2-port gigabit switch, with port 2 supporting PoE power transfer to other PoE devices, provides exceptional in-room wired and wireless connectivity for superior entertainment in hotel rooms, student housing, assisted living, senior living, multi-tenant dwellings, and classrooms.

### Features & Benefits

- Dual-band 802.11ax 2x2 supports up-to 1,200 Mbps (5 GHz) & 574 Mbps in 2.4 GHz
- Sleek, low-profile design for in-room Wi-Fi & wired connectivity
- On-board 2-port switch offers port-based 802.1Q VLAN support
- LAN1 & LAN2 support 802.3af/at PoE input for flexible installation up-to 328 feet
- Connect & power VoIP phones or other PoE devices with PSE Support
- SmartCasting to personalize in-room media with mobile device streaming to TV's
- Extend SSID settings to LAN ports & provide captive portal, splash page, and advanced security
- Mesh wireless support simplifies setup, optimizes signals & self-heals
- Remote connectivity diagnostics, Wi-Fi quality testing, and device configurations
- Manage an unlimited number of AP's from anywhere with the EnGenius Cloud
- Quick-Scan Device register, installation, and remote monitoring & troubleshooting
- No Access Point Licensing or Subscription Fees



### Processor

Qualcomm® Quad-Core CPU ARM Cortex A53s @ 1.0GHz

### Antenna

2 x 2.4 GHz: 4 dBi

2 x 5 GHz: 5 dBi

Integrated Omni-Directional Antenna

### Physical Interface

1 x 10/100/1000 Mbps Ethernet Uplink Port (back plate)

2 x 10/100/1000 Mbps Ethernet Switched Ports (client ports)

- Port 3 PoE PSE (ECW215 requires 802.3at power source)

1 x Reset Button

1 x DC Jack

### LED Indicators

1 x Multi-color LED for following behavior

- Power up

- Cloud connecting

- Disconnected

### Technical Specifications

#### Standards

IEEE 802.11ax on 2.4 GHz

IEEE 802.11ax on 5 GHz

Backward compatible with 802.11b/g/n/ac

### Power Source

Power-over-Ethernet: 802.3af/at Input

- PoE Output w/ 802.3at Input

IEEE 802.11e Compliant Source

DC Jack: 12V/1.5A 48V

### Maximum Power Consumption

14.2W

## Wireless & Radio Specifications

### Operating Frequency

Dual-Radio Concurrent 2.4 GHz & 5 GHz

### Operation Modes

AP, AP Mesh, Mesh

### Frequency Radio

2.4 GHz: 2400 MHz ~ 2482 MHz

5 GHz: 5150 MHz ~ 5250 MHz, 5725 MHz ~ 5850 MHz

### Transmit Power

Up to 20 dBm on 2.4 GHz

Up to 20 dBm on 5 GHz

### Tx Beamforming (TxBF)

### Radio Chains/Spatial Stream

2x2:2

### SU-MIMO

Two (2) spatial streams SU-MIMO for 2.4GHz and two (2) spatial streams SU-MIMO for 5GHz up to 1,774Mbps wireless data rate to a single 11ax wireless client device under both 2.4GHz and 5GHz radio.

### MU-MIMO

Two (2) spatial streams multi-user (MU)-MIMO for up to 1,200 Mbps wireless data rate to transmit to one (1) two streams MU-MIMO 11ax capable wireless client devices under 5GHz simultaneously.

Two (2) spatial streams multi-user (MU)-MIMO for up to 574 Mbps wireless data rate to transmit to one (1) two streams MU-MIMO 11ax capable wireless client devices under 2.4GHz simultaneously.

### Supported Data Rates (Mbps):

802.11ax:

2.4 GHz: 9 to 574 (MCS0 to MCS11, NSS = 1 to 2)

5 GHz: 18 to 1200 (MCS0 to MSC11, NSS = 1 to 2)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 300 Mbps (MCS0 to MCS15)

802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2)

### Supported Radio Technologies

802.11ax: Orthogonal Frequency Division Multiple Access (OFDMA)

802.11b: Direct-sequence spread-spectrum (DSSS)

802.11ac/a/g/n: Orthogonal Frequency Division

### Channelization

802.11ax supports high efficiency (HE) –HE 20/40/80 MHz

802.11ac supports very high throughput (VHT) –VHT 20/40/80 MHz

802.11n supports high throughput (HT) –HT 20/40 MHz

802.11n supports very high throughput under the 2.4GHz radio –VHT40 MHz (256-QAM)

802.11n/ac/ax packet aggregation: A-MPDU, A-SPDU

### Supported Modulation

802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM

802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM

802.11b: BPSK, QPSK, CCK

## Management

### Multiple BSSID

8 SSIDs for both 2.4GHz and 5GHz radios

### VLAN Tagging

Supports 802.1q SSID-to-VLAN Tagging

Cross-Band VLAN Pass-Through

Management VLAN

### Spanning Tree

Supports 802.1d Spanning Tree Protocol

### QoS (Quality of Service)

Complaint with IEEE 802.11e Standard

WMM

### SNMP

v1, v2c, v3

### MIB

I/II, Private MIB

### Wireless Security

WPA3 Enterprise

WPA3-PSK (SAE)

WPA3/WPA2-PSK Mixed

WPA2 Enterprise

WPA2 AES-PSK

Hide SSID in Beacons

MAC Address Filtering, up to 256 MACs per SSID

Wireless STA (Client) Connected List

SSH Tunnel

Client Isolation

L2 Isolation

## Environment & Physical

### Temperature Range

Operating: 32°F~104°F (0 °C~40 °C)

Storage: -40 °F~176 °F (-30 °C~80 °C)

### Humidity (non-condensing)

Operating: 90% or less

Storage: 90% or less

## Dimensions & Weights

### ECW215 Device

Weight: .80 lbs. (.363 Kg)

Length: 5.5" (140 mm)

Width: 3.5" (90 mm)

Height: 1.6" (40 mm)

### Packaging

Weight: .86 lbs. (.390 Kg)  
Length: 7.375" (187.3 mm)  
Width: 5.375" (136.5 mm)  
Height: 2.75" (69.9 mm)

### Master Carton

Weight: 11.5 lbs. (5.23Kg)  
Length: 17.72" (450mm)  
Width: 11.42" (290 mm)  
Height: 8.5" (215 mm)  
No. of boxes per carton: 12 units

### Package Contents





1 - ECW215 Cloud Managed Indoor Access Point  
1 - Ceiling and Wall Mount Screw Kits  
2 - Junction-plates (tall/short)  
1 - Quick Installation Guide

### Certifications

FCC, CE, IC

### Warranty

2 Year

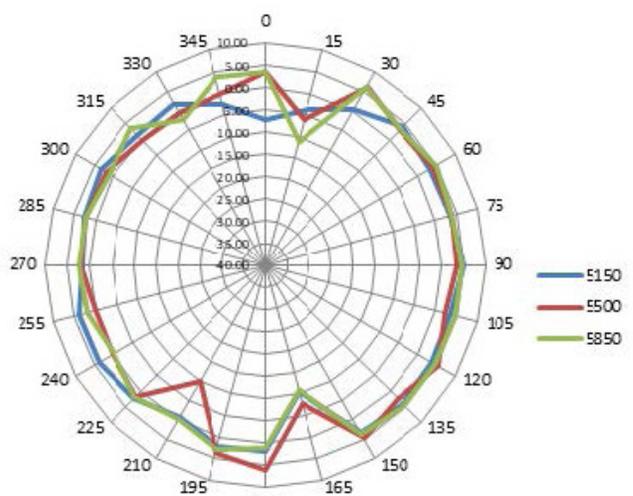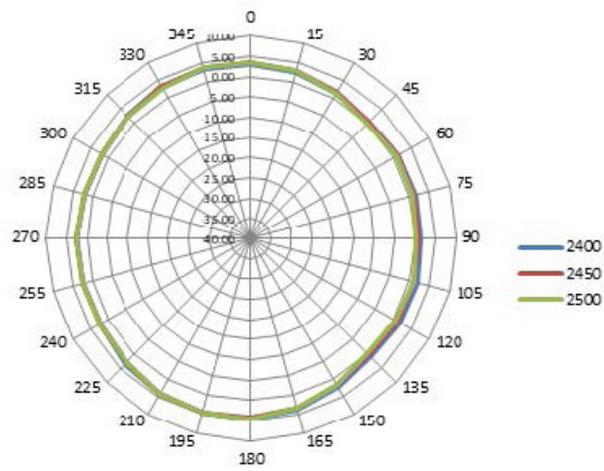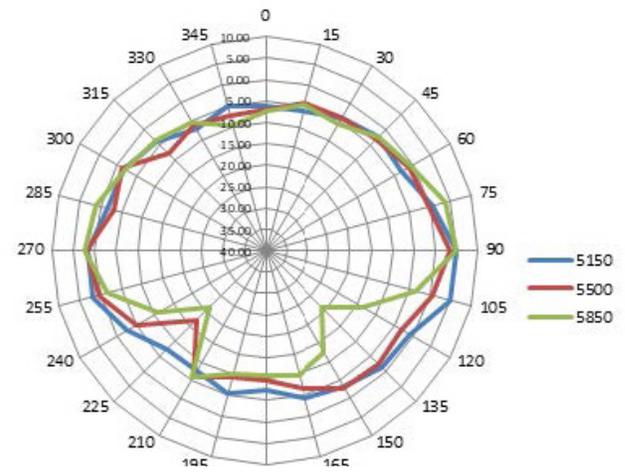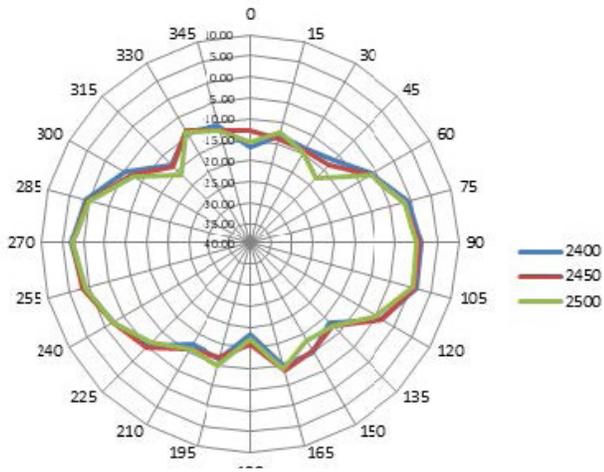


## ECW115 Indoor Access Point

Power LED



Port 1 - 802.3af/at  
PoE In

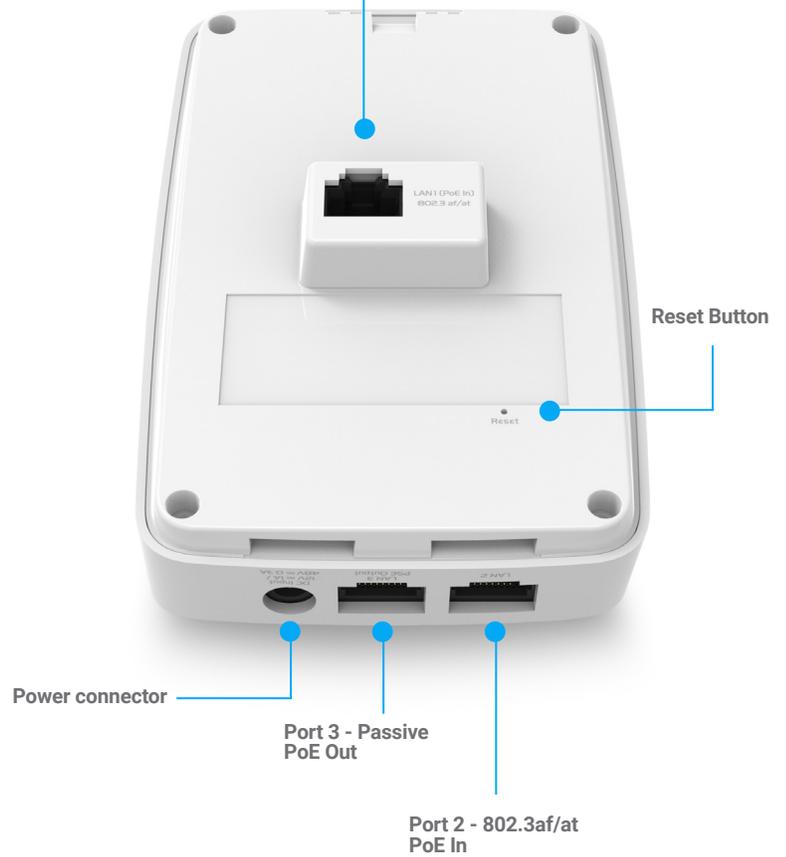

Plug & Play with Zero Configuration

# Scan & Go



EnGenius Technologies | 1580 Scenic Ave. Costa Mesa, CA 92626

Email: [partners@engeniustech.com](mailto:partners@engeniustech.com) | Website: [engeniustech.com](http://engeniustech.com)

Version: 9/2022

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright ©2022 EnGenius Technologies, Inc. All rights reserved. Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on distance between devices or traffic and bandwidth load in the network.