



Armario rack 19" con accesorios internos

Características

Armarios Rack Tipo Cabina fabricados en SPCC acero laminado en frío incluyendo accesorios internos.

Puerta frontal de vidrio templado con cerradura de seguridad. Puerta posterior con cerradura de seguridad.

Entrada de cableado superior e inferior. Laterales desmontables. Perfiles de acero laminado en frío de 2mm.

4 Pies de nivelación. Ruedas de alta resistencia con freno.

Ventilación en techo con ventiladores de 120mm (2 uds. para fondo 60cm y 4 uds. para fondos 80 y 100cm).


1 Termostato analógico para control de temperatura del rack. 1 PDU de 19" 8 schukos con interruptor.

1 Bandeja fija en 22U y 32U y 2 bandejas fijas en 42U. Tornillos y tuercas enjauladas.

Capacidad de carga estática de hasta 800 kg.

Color negro RAL 9004.

Dibujos técnicos

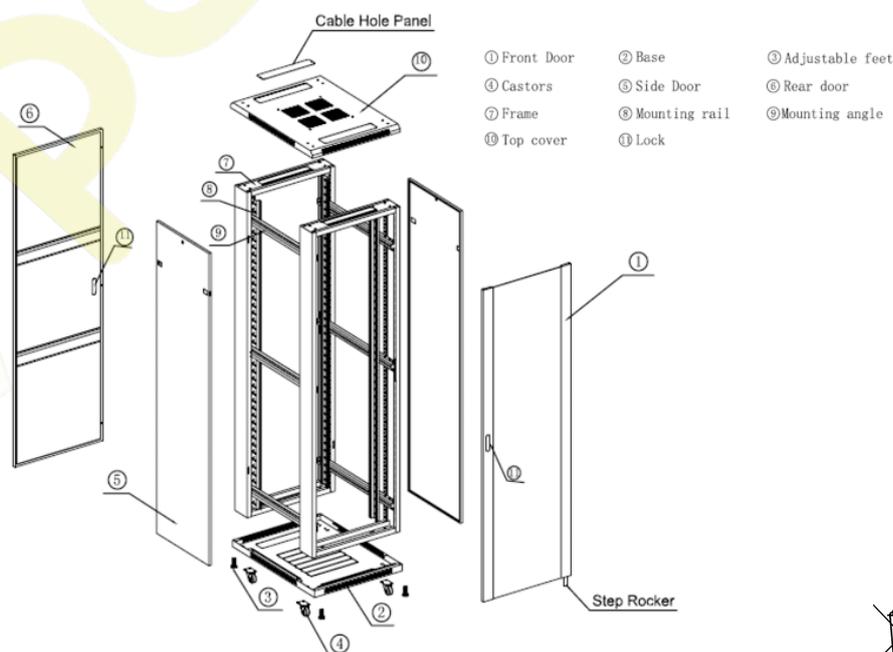

Datos técnicos

Specification	Qty.	Unit	Material	Surface Finish	Remark
Top Cover	1	PCS	SPCC Cold rolled steel 1.0 or 1.2	Powder coated	600mm depth for 1.0mm, above is 1.2mm
Bottom panel	1	PCS	SPCC Cold rolled steel 1.0 or 1.2	Powder coated	600mm depth for 1.0mm, above is 1.2mm
Mounting Profile	4	PCS	SPCC Cold rolled steel 2.0	Powder coated	
Mounting angle	6	PCS	SPCC Cold rolled steel 1.5	Powder coated	4pcs of lower 32U
Toughened glass or mesh front door	1	PCS	SPCC 1.5/Toughened glass 5.0	Powder coated	High Density vented door/ sheet steel door/ double section high density vented door optional
Frame	2	PCS	SPCC Cold rolled steel 1.2	Powder coated	/
Fan unit	1	PCS	SPCC Cold rolled steel 1.0	Powder coated	/
Fan	2	PCS	120*120*38mm	/	4pcs for over 600 width and 600 depth
Side panel	2	PCS	SPCC Cold rolled steel 1.0 or 1.2	Powder coated	600mm or 800mm depth for 1.0mm, above is 1.2mm
rear door	1	PCS	SPCC Cold rolled steel 1.0 or 1.2	Powder coated	600mm or 800mm width for 1.0mm, above is 1.2mm
Spring lock	1	PCS	/	/	with 2keys
Small round lock	1	PCS	/	Nickel coated	with 2keys
M6 Screw and Square Nuts	20	SET	steel	Zinc coated	40sets for over 32U
Adjustable feet	4	PCS	steel	Zinc coated	/
Wheels	4	PCS	/	/	/

Standard

Comply with ANSI/EIARS-310-D, DIN41491;PART1, IEC297-2, DIN41494;PART7, GB.T3047.2-92
Standard.Compatible with metric ETSI and 19 inch international standard

Features

Material: Cold Rolled Steel
Modern stylish appearance and elegant exterior
19" standard assembly width
Detachable Composite Structure
Vertical cabinet can move backwards and forwards and adjust up and down to mount instrument
Fan heat dissipation device
Equipped with castor and adjustment feet
Degrease, acid picking, rust prevention and parkerizing pure water cleaning, static electricity plastic for the surface
High strength toughened glass or perforated front door
Maximum Static Loading Capacity: 800KGS (With adjustable feet)
Color: Black

Accessories

Screw and Nut (serial). 4pcs castor and adjustment feet (serial) fixed shelf (serial) 2 fans for 600x600MM for cabinets (serial). 4 fans for 600x800/900/1000MM for cabinets (serial). Thermostat (serial). Sliding shelf (optional). 19" PDU (optional).

Packing Method

Whole package: The cabinet have been assembled. The whole cabinet are packed into one export carton.

Referencia	Código EAN	Uds. caja	Dimensiones	Peso
RAC-22660-HQ	8436539914358	1	22U (60 x 60 x 104 cm)	35 kg
RAC-22680-HQ	-	1	22U (60 x 80 x 104 cm)	40 kg
RAC-22610-HQ	-	1	22U (60 x 100 x 104 cm)	45 kg
RAC-22880-HQ	-	1	22U (80 x 80 x 104 cm)	45 kg
RAC-32660-HQ	8436539914365	1	32U (60 x 60 x 161 cm)	55 kg
RAC-32680-HQ	-	1	32U (60 x 80 x 161 cm)	60 kg
RAC-32880-HQ	-	1	32U (80 x 80 x 161 cm)	65 kg
RAC-32610-HQ	-	1	32U (60 x 100 x 161 cm)	65 kg
RAC-42660-HQ	8436539914372	1	42U (60 x 60 x 198 cm)	95 kg
RAC-42680-HQ	-	1	42U (60 x 80 x 198 cm)	100 kg
RAC-42610-HQ	-	1	42U (60 x 100 x 198 cm)	105 kg
RAC-42880-HQ	-	1	42U (80 x 80 x 198 cm)	105 kg
RAC-42810-HQ	-	1	42U (80 x 100 x 198 cm)	110 kg



Made in China.



Las especificaciones e imágenes están sujetas a cambios sin previo aviso.
Los nombres referidos y las marcas registradas son pertenecen a sus propietarios.